

Specialists in endoscope reprocessing
for more than 25 years!

WASSENBURG® WD440 PT Endoscope Washer Disinfector

+ **Smart logistic concept**

High level technology combined with optimum logistics.

+ **Outstanding controllability**

Clever clean-contaminated separation with incredibly low air leakage between the clean and contaminated area.

+ **Synergy**

Unique Wassenburg WD440 PT technology: the perfect match for a wide range of flexible endoscopes.

+ **Full traceability**

Access to processes for monitoring, analysis and calculation has never been so easy and reliable by using a data printout or Process Manager.



OPTIMUM CONTROL

- + Channel separation
- + Flow and pressure control
- + Tube connection control
- + Independent Monitoring system
- + Leakage control
- + Blockage control
- + Traceability with Process Manager
(and upload possibility to third party programmes)

DIMENSIONS AND WEIGHT


Width x Depth x Height: 1100 x 790 x 2060 mm (+ 15 mm on top, for several connection plugs)
Weight when empty (approx.): 325 kg

ELECTRICAL CONNECTION

Voltage: 220 – 240 V (frequency 50Hz)
Type of electrical connection: plug with ground connection

WATER SUPPLY AND DRAIN

Min. / max. pressure: 2.5 / 4 bar (max. difference between hot and cold water supplies: 1 bar)
Minimum flow rate for hot / cold water supplies: 10 l/min (drain capacity: 20 l/min per drain)
Drain: 2 drains + 1 shared overflow (diameter per drain: >DN50)
Height of drain: 530 mm (+/- 5 mm) – drain from machine has a height of 430 mm

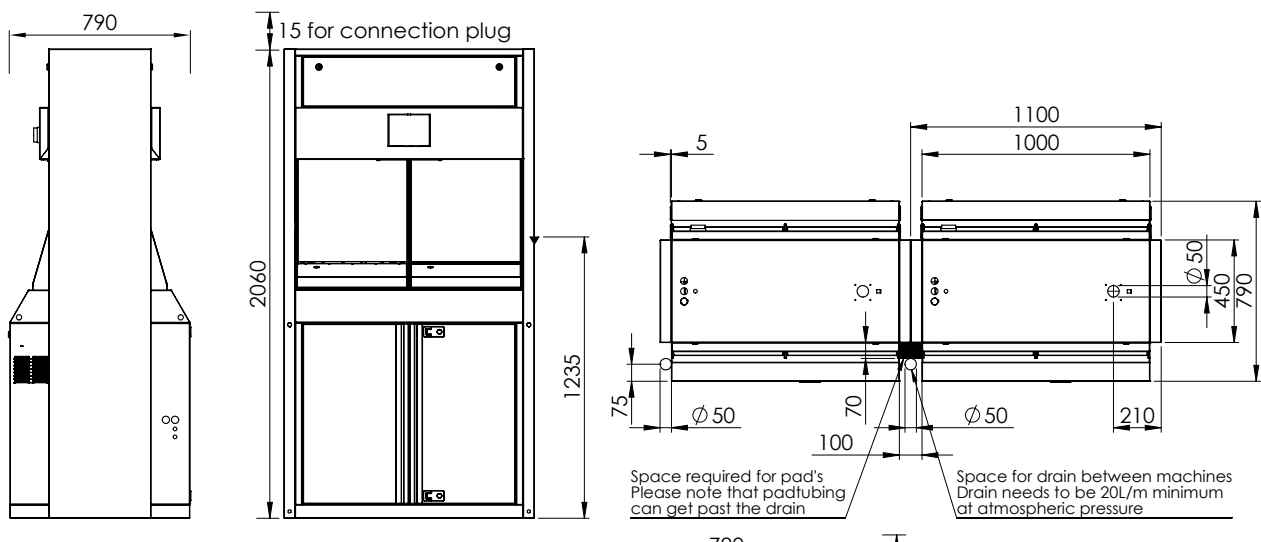

Please contact us for the full installation specifications of the WASSENBURG® WD440 PT.
The WASSENBURG® WD440 PT is CE-marked. © Copyright 2012. Subject to alterations.

Wassenburg Medical Devices B.V.
Edisonring 9
6669 NA DODEWAARD
THE NETHERLANDS

T: +31 (0) 488 453 686
F: +31 (0) 488 453 685
info@wassenburg.nl
www.wassenburg.nl